





3 years warranty

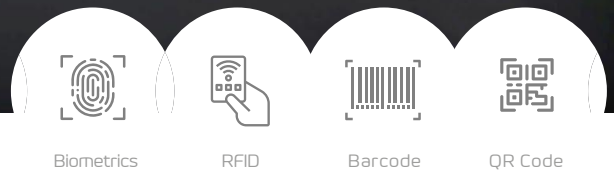

The fastest compact turnstile-slide on the market.

It is perfect for sites with a large visitor flow rate and in both directions. The opening/closing speed is **0.2 seconds** and **55 people per minute**. It has long lasting performance, high reliability of operation and fast response.

3-year warranty. In its unique and modern design, it incorporates magnetic card panel, attractive blue LED strip, brushed stainless steel solid body case and high-end black paint.

It supports the standard 650 mm turning type and the 1000 mm turning type for people with reduced mobility for wide passage. Pedestrians with large luggage can also pass.

Turnstile ultra-fast

Features

- Brushed stainless steel and high-end black paint.
- Choice of one-way or two-way.
- Ideal for both indoor and outdoor use.
- Decorative LED light bar, gives a modern look.
- Automatic reset function: the winch arm will automatically lock within 5 sec. (can be adjusted) if the passenger delay is given to the entrance.
- RFID, fingerprint and biometric reading device can be integrated.



Technical specifications

| | |
|-------------------------------|--|
| Certification | Compliance CE |
| Communication | Dry contact, Relay signal, RS485 |
| Framework Material | 304 brushed stainless steel+ High end black painting |
| Arm material | Plexiglas-transparency |
| Dimension / Net Weight | 1600 * 150 * 980mm / 85kg/pcs (single core), 105kg/pcs (double core) |
| Passage Width | 650mm (standard), 1000mm (handicap) |
| Passing Direction | Single directional / Bi-directional |
| MCBF | 15 million |
| Power Supply / Voltage | AC220V/110V, 50/60Hz / 24V DC |
| Power Consumption | 90-100W |
| Operation Temperature | -20 °C - 75 °C |
| Operation Humidity | 0 ~ 95% (No freeze) |
| Working Environment | Indoor / Outdoor (shelter) |
| Flow Rate | 55 people per minute |
| LED Indicator | Unique blue LED strip (front+ top+ arm) |
| Infrared Sensor | 8 pairs (standard) |
| Emergency | Automatic arm open when power off |

Dimensions (mm)

