




Vartical Tripod Turnstile

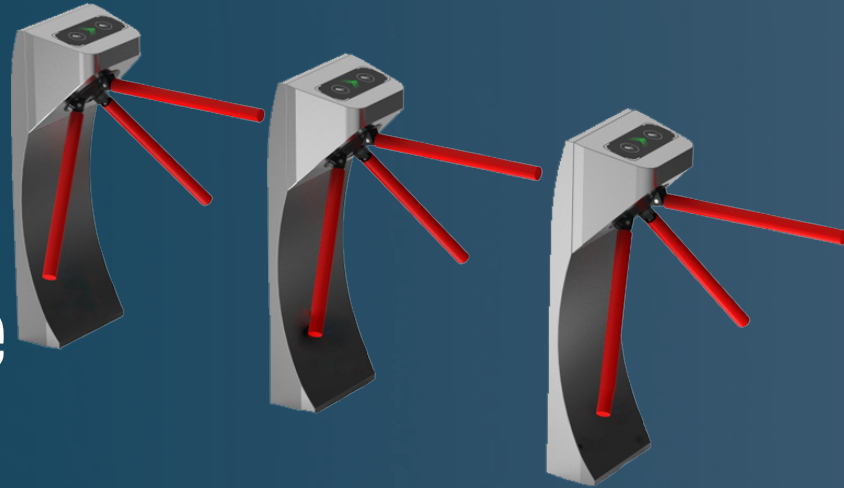


EF-TV5100

- Auto replacement function, reposition after person pass by
- Anti tail function auto-lock once turn 120°
- Arms auto drop when power off, ensure unblocked when accident
- Standard electronic interface, remote control through internet which could also connect variety of card readers and receive relay signal to work
- Diverse control mode optional, changeable due to varying, convenient for your manage
- Auto alert error function, comfort for user maintain and operate
- Manual button or remote control ,Bi-directional passage
- Open signal with memory or with out set function
- Red and green light to show pass or stop, leisure to exit and entrance

Key Features

- Cabinet & Internal Structure is in 304 SS grade.
- Length of Swing Arm 500 to 550mm
- With drop arm features
- Unlock Time 0.6 second
- Passing Speed 30-40 Person/Min.
- Passing Width 500-550mm
- Power Supply AC220,50/60Hz
- Operational Voltage Motor (24V)
- Working Temp -10°C to +60°C
- Protection Level IP55
- Electro Mechanical Drive DC
- Dimension Excluding Bars (H 1055 xW 305 xD 170 mm)

Dimension (mm)

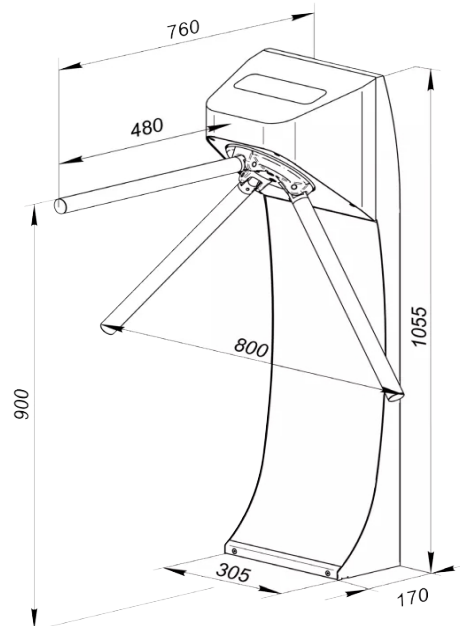

Specification

Specification

EF-TV5100

Cabinet/Body Structure

SS. 304 Grade

Open angle

90°

Operational Voltage

24V

Pass speed

30 ~ 40 Person/Minutes

Motor

Electro Mechanical

Power Voltage

AC220 ± 10%, 50Hz

Operation condition

-10°C ~ 60°C

Structure

Frame or 304 Stainless steel cover

Open direction

Single and Double(Optional)

Working Current

≤ 2000 mA

IP Degree

IP55

Length of the bar / Swing Arm

500mm ~ 550mm

Duty Cycle

100%

Width of passage

≤ 550 mm

Dimension

1055 x 305 x 170 mm

