


3 years  warranty

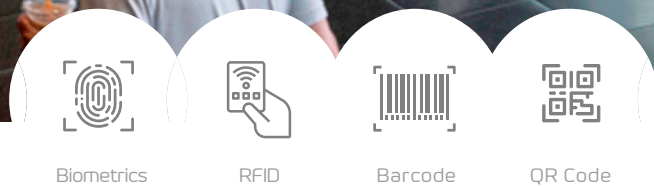

Turnstile for access control with different glass heights.

The passage width can reach 600mm for normal passage, and it can support 900mm or 1200mm arm for wide passage; wheelchair and pedestrians with large luggage can also pass.

The glass arm can be raised 900mm to 1800mm for high security control. Brushed stainless steel body, sturdy, anti-rust, waterproof and durable. The opening speed is 0.2 seconds.

3-year warranty. Ideal for areas where aesthetics are required; hotels, buildings, libraries, cinemas, gymnasiums, etc.

Speed Turnstile

Features

- It is ideal for both indoor and outdoor use.
- Single or bi-directional direction can be selected.
- Automatic reset function: the turnstile arm will automatically lock within 5 sec (can be adjusted) if the passenger delay is given to the entrance.
- Integrate with RFID, fingerprint and biometric reading device.
- In case of emergency, the arms will open automatically to allow free passage when power off.




Technical Specifications


| | |
|-----------------------|--|
| Frame material | 304 stainless steel |
| Arm material | tempered glass |
| Dimensions and Weight | 1605 * 127 * 1000mm / 75kg/pcs |
| Pitch width | 600-1200mm (one step) |
| Arm height | 900-1800mm (max.) |
| Pitch direction | Monodirectional and bidirectional |
| MCBF | 15 million |
| Power Supply | AC220V/110V, 50/60Hz |
| Operating voltage | 24V DC |
| Power consumption | 40W |
| Operating temperature | -15 °C - 60 °C |
| Operating humidity | 0 ~ 95% (no freezing) |
| Operating environment | Indoor / Outdoor |
| Flow rate | 50-55 persons per minute |
| Indicator | Yes |
| Infrared sensor | 16 pairs |
| Emergency | Automatic arm opening when power is disconnected |
| Communication | Dry contact, relay signal, RS485 |



Dimensions (mm)

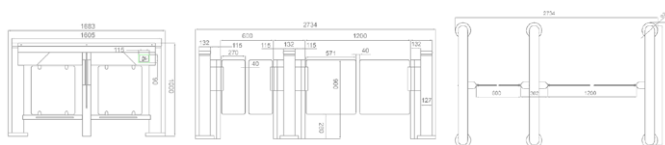

Short glass arm

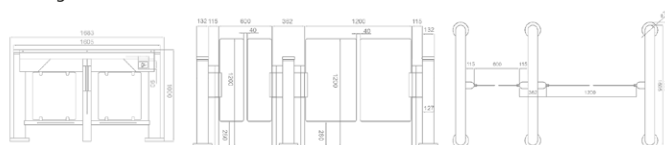

Long glass arm

